


# CCI 680 PETG PN: CCI 680 PETG

**DESCRIPTION:** Cleanable Dissipative PETG | Permanent **APPLICATION:** Thermoforming | Long-Term Use

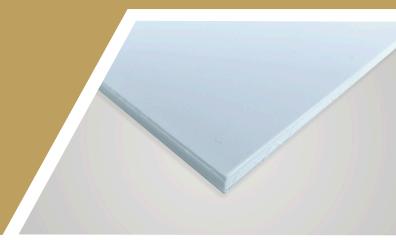

## MATERIAL INFO

S680 is CCI's highest quality static dissipative, thermoformable material. This material is IDP inherently static dissipative. It can be cleaned with IPA, used repeatedly and stored long term. For high value devices that are sensitive to FOD, static or physical damage this is the perfect choice. S680 is blue in color.

## **CHARACTERISTICS**

- Inherently Static Dissipative
- Humidity insensitive
- Ultra-clean: low off-gassing and low ionic contamination

## **APPLICATIONS**

- Medical device packaging
- Electronic component handling
- Hard disk packaging



#### **SPECIFICATIONS**

PROPERTY	VALUE (U.S.)	TEST METHOD
Color	Light Blue	Visual
Static Decay Rate (50% RH)	0.1 Sec	Charged Plate Monitor
Resistance		
Volume Resistance	<1010	ANSI/ESD STM11.12-2021
Surface Resistance	<109	ANSI/ESD STM 11.11-2022
Heat Deflection Temp	131 °F	D-648

#### All values are for pre-formed materials. Electrical values will vary with each individual design.

All information, recommendations and suggestions appearing in this bulletin concerning the use of our products are based upon tests and data believed to be reliable: however, it is the user's responsibility to determine the suitability for their own use of the products described herein. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Conductive Containers, Inc. as to the effects of such use or the results to be obtained, nor does Conductive Containers, Inc. assume any liability arising out of use, by others, of the products referred to herein. Nor is the information herein to be construed as absolutely complete since additional information may be necessary or desirable, when particular or exceptional conditions or circumstances exist orbecause of applicable laws or government regulations. Nothing herein contained is to be construed as permission or as a recommendation to infringe any patent.