CORSTACKER HANDLING TRAYS

- Constructed with durable Corstat®
- Double walled and molded corners ensure secure stacking
- Highly reusable and recyclable
- Includes 1/8" crosslink static dissipative foam pad laminated to a Corstat® stiffener pad
- Also available in Durastat

PN	L X W X H (D)
6201A	6201w/.125 LD30 & Corstat pad
6202A	6202w/.125 LD30 & Corstat pad

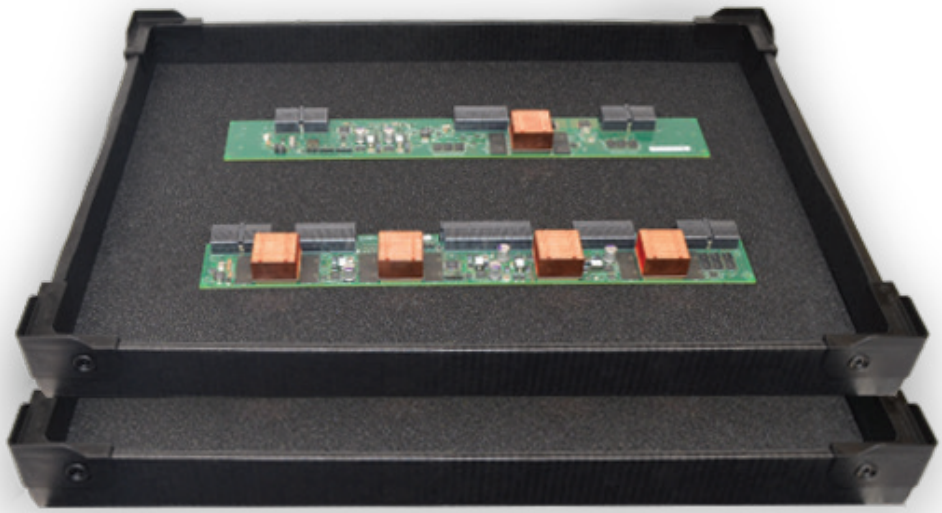

SPECIFICATIONS

These products meet and/or exceed ANSI/ESD S20.20-2021 and ANSI/ESD S541-2019.

CORSTAT®

PROPERTY	VALUE (U.S.)	TEST METHOD
Color	Black	Visual
Surface Resistance		
Burried Shielding-layer Ohms	10^2-10^3 Ohms/sq	ANSI/ESD STM11.11-2022
Outer Dissipative-layer Ohms	10^4-10^5 Ohms/sq	ANSI/ESD STM11.11-2022
Electrostatic Decay Rate	Avg. 0.01 sec	EIA-541
ESD Shielding	Avg. 16.49nJ	Capacitative Probe Test
Reducible Sulphur	.00035%	TAPPI-406

SDFM | LD30SD

PROPERTY	VALUE (U.S.)	TEST METHOD
Color	Black	Visual
Volume Resistance	10^4-10^9 Ohms/sq	ANSI/ESD STM11.12-2021
Surface Resistance	10^4-10^9 Ohms/sq	ANSI/ESD STM11.11-2022
Apparent Density	1.87 lbs/ft3	FTMS 101-C 4046.1
Max Operating Temp*	203 °F	Internal